

# Product Specifications

**NAME: Low –voltage touch panel Color-temperature Controller (America standard)**

**MODEL: KW-TM07U**




## Summarization

Touch panel controller is a new high-end dimmer which newly developed by our company. It adopts glass panel design, is beautiful and fashionable in appearance. It adopts high precision capacitance touch control chip, increases the touch sensitivity, reduces trigger which caused by mistake. It is used for controlling a variety of lamp whose source of light is LED. For instance, point source of light, flexible light strip, panel lights etc., it has many advantages such as convenient to connect, easy to use and others.

## Technical Parameters

- Working temperature: -20-60 °C
- Supply voltage: DC12-24V
- Output voltage: DC12-24
- Output: 2 channels
- Connection mode: common anode
- External dimension: L74 X W120X H42mm
- Packing size: L145 X W99X H53 mm
- Net weight: 127g
- Gross weight: 177.5g
- Static power consumption: <1W
- Output current: <4A( each channel )
- Output power: 12V<96W,24V<192W

## External Dimension

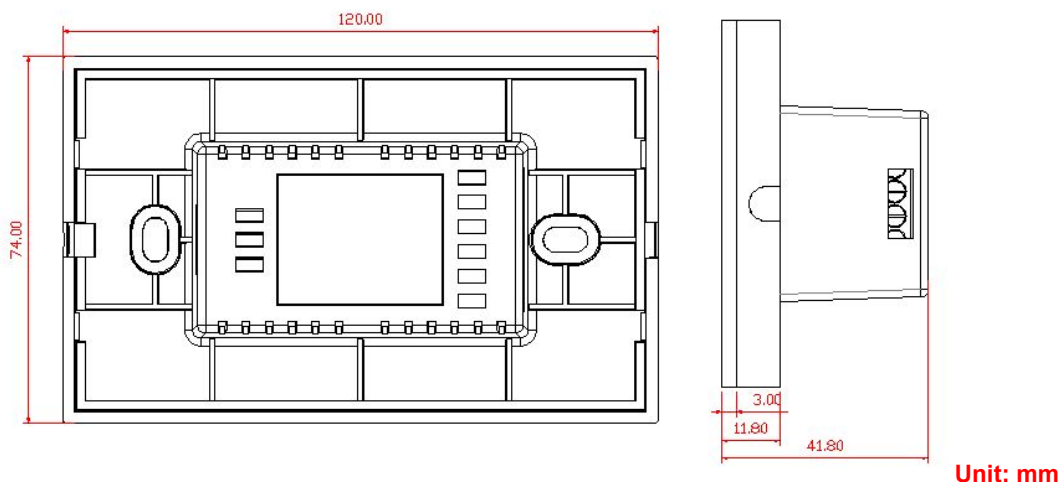

### Interface Specifications



4 and 5: power input, input voltage range: 12-24V, 4 for positive, 5 for negative.

1,2 and 3: power output, output voltage is 12-24V, Max output current is 8A, 3 for positive, 1 for the cool color lamp interface, 2 for the warm color lamp interface.

### Controller instruction:

1. Button function:



: set key for color-temperature, up to 46 touch points.



: turn on/off controller at any state; when in an open state, long press the button more than 3 seconds to open or close the output of the buzzer.



: reduce mode




: increase mode

2. Standard change is shown in the below table:

Mode No.	Function	Mode No.	Function
1	warm white	7	Cold White +80% warm white
2	warm white +20% Cold White	8	Cold White +60% warm white
3	warm white +40% Cold White	9	Cold White +40% warm white
4	warm white +60% Cold White	10	Cold White +20% warm white
5	warm white +80% Cold White	11	Cold White
6	White		

### Typical Application

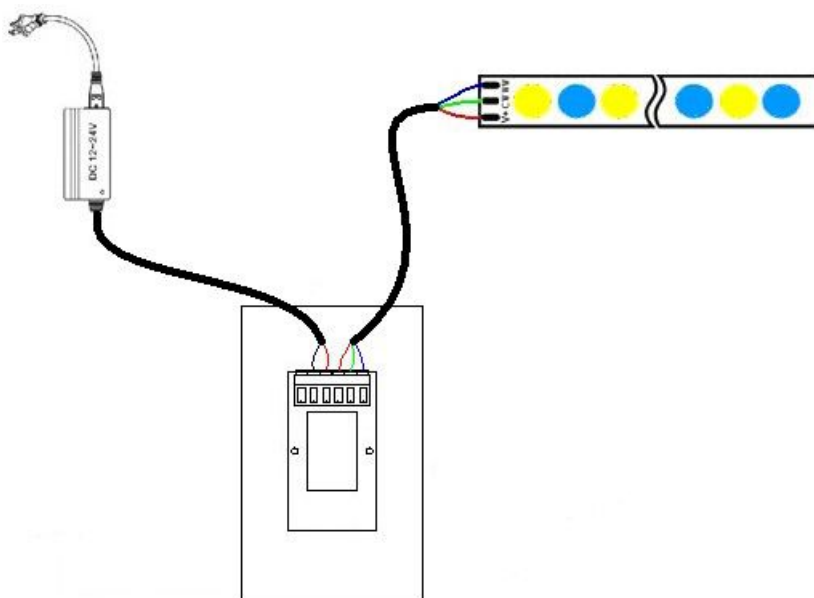

### Installation Method

1. gently pry gaps in touch panel with a screwdriver, and then you can slowly remove the panel, as shown below;




### 2. Wiring

Connect wiring according to typical application. Refer to typical application;

### 3. Install switch base

As shown in the picture, mount the controller on the cassette in the wall after connecting the wire, and then nail the screw, fix it on the wall, finally you can install the switch pedestal on the wall;

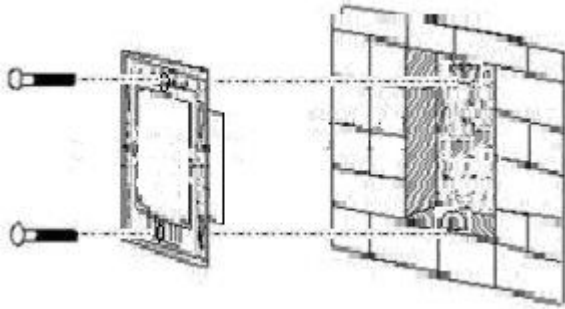

### 4. Close touch panel

Look at the direction of touch panel, and then closed the touch panel.

### Remarks:

1. Connect the load wire at first, following by the power wire; **Please ensure short circuit can not occur between connecting wire before you turn on the power;**
2. The supply voltage of controller ranges in DC12V~DC24V, it may burn out the controller once exceed the voltage ranges.